

High-performance ABS Digimatic Indicators ID-C/ID-F

DIGIMATIC S1

NEW
Products



High-performance
ABS Digimatic
Indicator

ID-C/ID-F

NEW
Products

New-generation ID series making measurement operations smoother and enhancing production quality

Bidirectional serial communication that helps increase work efficiency

Meeting the need for more precise measurements

A wide range of support functions for smoother measurement work




ID-C Series

*The ID-C series does not have illuminated backlighting.



ID-F Series

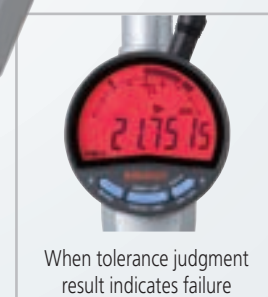

When tolerance judgment result indicates failure

Enabling more precise measurement
0.5 μm/0.00002 in resolution


The ID-C and ID-F ranges now include models with 0.0005 mm/0.00002 in resolution. The units are also capable of resolution switching.*

*Except for the ID-C 0.01 mm/0.0005 in resolution model



Avoid missing a pending calibration
Calibration schedule warning

The operator can set a calibration validity and reminder date. This function can support better management of the gages.

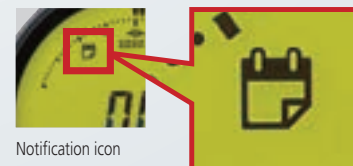

Notification icon


The icon starts blinking at a set time before calibration is due (e.g. 1 week before the calibration date). If the due date is exceeded, the entire screen starts blinking to notify the user.

The first Mitutoyo measuring tools to support bidirectional serial communication. Dramatically improve work efficiency by connecting and linking with a PC.

The ID-C/ID-F units are Mitutoyo's first measuring tools to support bidirectional serial communication.* They can be easily connected and linked with a PC via a USB input tool, etc., and in addition to conventional measurement data collection, they also enable control and setting of the ID-C/ID-F units, collection of gauge information, and other operations to be performed in batch from the PC. This contributes to drastic improvement in work efficiency.

*Achieved through I/F compatible with an original bidirectional serial communication specification (Digimatic S1). ▶ See P.6 for details.

● An optional cable and measurement data input unit are required for bidirectional serial communication. ● USB-ITPAK V3.0 must be installed on the PC used for communication.

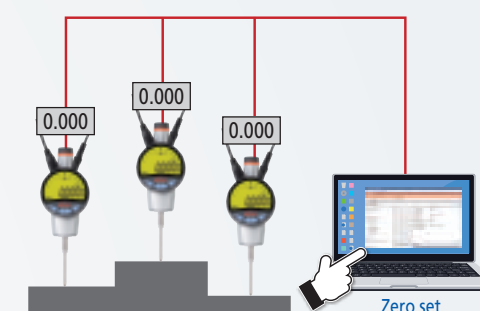


Function example (1)
Control of ID-C/ID-F from PC

New model
(ID-C/ID-F + USB-ITPAK V3.0)

● Batch zero setting and power ON/OFF operation, etc. of multiple ID-C/ID-F units is made possible by use of the dedicated software "USB-ITPAK."

→ Ease of use greatly improved

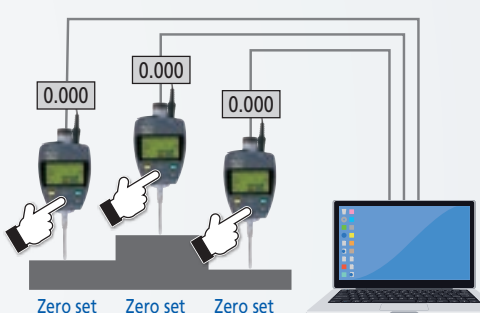

Old model
(Old ID-C/ID-F + USB-ITPAK V2.1)

● For older ID-C/ID-F units that do not support bidirectional serial communication, individual button operation is necessary for zero setting.

Function example (2)
Measuring instrument setting

New model
(ID-C/ID-F + USB-ITPAK V3.0)

● Various functions of ID-C/ID-F units can be set from USB-ITPAK.
● The contents of various function settings can be saved on a PC, and you can copy them to other ID-C/ID-F units.


→ Reduced work time for setting

Old model
(Old ID-C/ID-F + USB-ITPAK V2.1)

● Since bidirectional serial communication is not supported, function setting from a PC is not possible.

Improved work efficiency thanks to excellent readability
Large screen and analog bar

The units have large screens that can display various information in an easy-to-read manner. They also have an analog bar, convenient for observing subtle movements such as the approach to tolerance.

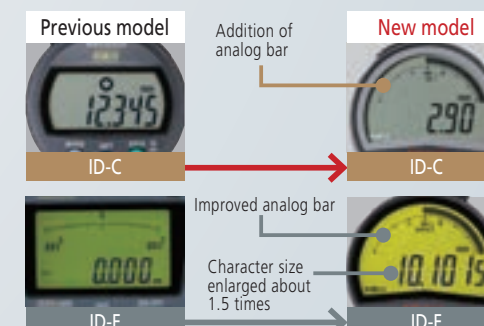

Setting of frequently used functions for easy operation
Three large buttons

Ease of use is greatly improved by three large buttons. You can freely set any frequently used functions to these buttons.



1 Parameter setting mode

● Counting direction switching
● Tolerance judgment function setting
● Calculation function setting
● Resolution switching
● Function lock setting

2 Switching between ABS (presetting) and INC (zero setting)

3 Power ON/OFF

● Data output (when connected to an external device)
● Data hold (when not connected to an external device)

Improved measurement work efficiency
Simple calculation function

The result of the spindle movement value multiplied by the calculation coefficient can be displayed in real time. This reduces the work of measuring with a jig or similar tool.

f(x) = Ax

f(x): Displayed value

x: Spindle movement value

A: Selected value

Watch the video for details.



Product information

ID-C Series



SPECIFICATIONS

Metric ISO/JIS Type

Code No.		Range (mm)	Resolution (mm)	Maximum permissible error (MPE)* ¹ (mm)				Maximum permissible limit (MPL)	Net mass (g)	
w/ lug	Flat back			Partial measuring range <i>P</i> _{MPE}	Total measuring range <i>E</i> _{MPE}	Hysteresis <i>H</i> _{MPE}	Repeatability <i>R</i> _{MPE}	Measuring force (N)	w/ lug	Flat back
543-700	543-700B	12.7	0.0005/ 0.001/0.01 (selectable)	0.003	0.003	0.002	0.002	1.5 or less	175	165
543-705* ²	543-705B* ²							0.4 to 0.7	170	160
—	543-720B							1.8 or less	—	195
—	543-730B	50.8	0.01	0.005	0.005	0.02	0.01	2.3 or less	—	260
543-710	543-710B	12.7		0.02	0.02			0.9 or less	170	160
543-715* ²	543-715B* ²							0.2 to 0.5	165	155
—	543-725B							1.8 or less	—	190
—	543-735B	50.8		0.04	0.04			2.3 or less	—	245

*1 These values apply to normal measurements at 20 °C (Resolution: 0.0005 mm, Allowable value: A=1) *2 Low measuring force

Inch/ Metric ISO/JIS Type

Code No.		Range	Resolution	Maximum permissible error (MPE)* ¹ (mm)				Maximum permissible limit (MPL)	Net mass (g)	
w/ lug	Flat back			Partial measuring range <i>P</i> _{MPE}	Total measuring range <i>E</i> _{MPE}	Hysteresis <i>H</i> _{MPE}	Repeatability <i>R</i> _{MPE}	Measuring force (N)	w/ lug	Flat back
543-701	543-701B	0.5 in/ 12.7 mm	0.00002/0.00005/ 0.0001/0.0005 in, 0.0005/0.001/ 0.01 mm (selectable)	0.003	0.003	0.002	0.002	1.5 or less	175	165
543-706 ^{*2}	543-706B ^{*2}							0.4 to 0.7	170	160
—	543-721B	1 in/ 25.4 mm	0.01 mm (selectable)	0.005	0.005	0.002	0.002	1.8 or less	—	195
—	543-731B	2 in/ 50.8 mm						2.3 or less	—	260
543-711	543-711B	0.5 in/ 12.7 mm						0.0005 in/ 0.01 mm	0.02	0.02
543-716 ^{*2}	543-716B ^{*2}		0.2 to 0.5	165	155					
—	543-726B	1 in/ 25.4 mm	0.04	0.04	0.02	0.01	0.01	1.8 or less	—	190
—	543-736B	2 in/50.8 mm						2.3 or less	—	245

*1 These values apply to normal measurements at 20 °C (Resolution: 0.0005 mm, Allowable value: A=1) *2 Low measuring force

Inch/ Metric ASME/ANSI/AGD Type

Code No.		Range	Resolution	Maximum permissible error (MPE)* ¹ (in)			Maximum permissible limit (MPL)	Net mass (g)	
w/ lug	Flat back			Overall* ³	Hysteresis	Repeatability	Measuring force (N)	w/ lug	Flat back
543-702	543-702B	0.5 in/ 12.7 mm	0.00002/0.00005/ 0.0001/0.0005 in, 0.0005/0.001/ 0.01 mm (selectable)	±0.00012	0.00008	0.00008	1.5 or less	195	165
543-707* ²	543-707B* ²						0.4 to 0.7	190	160
—	543-722B	1 in/ 25.4 mm					1.8 or less	—	195
—	543-732B	2 in/ 50.8 mm		±0.00020			2.3 or less	—	260
543-712	543-712B	0.5 in/ 12.7 mm	0.0005 in/ 0.01 mm	±0.0010	0.0010	0.0005	0.9 or less	190	160
543-717* ²	543-717B* ²						0.2 to 0.5	185	155
—	543-727B	1 in/ 25.4 mm					1.8 or less	—	190
—	543-737B	2 in/50.8 mm		±0.0015			2.3 or less	—	245

*1 These values apply to normal measurements at 20 °C (Resolution: 0.0005 mm, Allowable value: A=1) *2 Low measuring force *3 Overall magnification and linearity

See page 7 for external dimensions

Common Specifications

	12.7 mm/0.5 in models	Low measuring force models*1	25.4 mm/1 in, 50.8 mm/2 in models
Display	7 segments height: 11.0 mm, Analog bar (±20 scale)		
Display rotation	330 °		
Protection level*2	Equivalent to IP-42		
Possible plunger direction	All directions	0.0005 mm models: Plunger downward only 0.01 mm models: Up to direction in which plunger is horizontal	Up to direction in which plunger is horizontal
Power source	Lithium metal battery CR2032 (1pc.)		
Battery life*3	Approx. 2.5 years (normal use), Approx. 2,700 hours(continuous use)		
Detection method	Electrostatic capacitance type absolute linear encoder		
Response speed	No limit		
Errors, Alarms	Various setting errors, Sensor error, Display overflow, etc.		
Operating temperature	0 to 40 °C		
Storage temperature	-10 to 60 °C		

*1: The item whose Code No. with an asterisk *2 is Low measuring force model like 543-706*2. See the specification table above.
*2: Protection level (IP=International Protection) is based on IEC 60529 (JIS C 0920). The levels shown are valid for factory conditions only.
*3: When the data processor is not connected. Battery life depends on use of the indicator. Use the above value as a reference.
Note: Allows high accuracy measurements of MAX/MIN and TIR (MAX-MIN). The peak detection speed is 50 times/s.
Various contact points are available as optional accessories.

ID-F Series



SPECIFIATIONS

Code No. w/ lug	Range (mm)	Resolution (mm)	Maximum permissible error (MPE)*1 (mm)				Maximum permissible limit (MPL)	Response speed	Power source	Net mass (g)				
			Partial measuring range P_{MPE}	Total measuring range E_{MPE}	Hysteresis H_{MPE}	Repeatability R_{MPE}	Measuring force (N)							
543-855	12.7	0.0005/ 0.001/ 0.01	0.0025	0.0025	0.002	0.002	1.5 or less	Unlimited	ACadapter (5.9 V)	180				
543-855B (flat back)							1.8 or less			170				
543-851	25.4		0.004	0.004			2.3 or less			240				
543-853	50.8		0.003	0.003						330				
543-857	50.8													

*1 These values apply to normal measurements at 20 °C (Resolution: 0.0005 mm, Allowable value: A=1)

Inch/Metric ASME/ANSI/AGD Type

Code No.	Range	Resolution	Maximum permissible error (MPE)*1 (in)			Maximum permissible limit (MPL) Measuring force (N)	Response speed	Power source	Net mass (g)
			Overall*2	Hysteresis	Repeatability				
543-856	0.5 in/ 12.7 mm	0.00002/ 0.00005/ 0.0001/ 0.0005/ 0.001 in,	±0.00010	0.00008	0.00008	1.5 or less	Unlimited	ACadapter (5.9 V)	200
543-856B (flat back)						1.8 or less			170
543-852	1 in/ 25.4 mm	0.0005/ 0.001/ 0.01 mm	±0.00016			2.3 or less			240
543-854	2 in/ 50.8 mm		±0.00012						330
543-858									

*1 These values apply to normal measurements at 20 °C (Resolution: 0.0005 mm, Allowable value: A=1) *2 Overall magnification and linearity
Note: To denote your AC power cable add the following suffixes to the order No.: -A for UL/CSA, -D for CEE, -DC for CCC, -E for BS, -K for KC, No suffix is required for JIS/100 V.

See page 8 for external dimensions

Common Specifications

Display	7 segments height: 11.0 mm, Analog bar (±20 scale)	Response speed	No limit
Display rotation	330 °	Errors, Alarms	Various setting errors, Sensor error, Display overflow, etc.
Protection level*1	Equivalent to IP-40 (No protection against ingress of water)	Output	d1, d2
Possible plunger direction	Up to direction in which plunger is horizontal	I/O	S1
Power source	AC adapter (DC 5.9 V)	Operating temperature	0 to 40 °C
Detection method	Electrostatic capacitance type absolute linear encoder	Storage temperature	-10 to 60 °C

*1: Protection level (IP=International Protection) is based on IEC 60529 (JIS C0920). The levels shown are valid for factory conditions only.
Note: Allows high accuracy measurements of MAX/MIN and TIR (MAX-MIN). The peak detection speed is 50 times/s for resolution of 0.0005 mm and 500 times/s otherwise.
Various contact points are available as optional accessories.


Comparison of functions

	ID-C Series	ID-F Series		ID-C Series	ID-F Series
Preset	✓	✓	Analog bar display ON/OFF	✓	✓
Zero set	✓	✓	Analog bar scale selecting	✓	✓
Peak detection (Max, Min, TIR)	✓	✓	Key customize	✓	✓
Unit system switching*1	✓	✓	Function lock	✓	✓
Counting direction switching	✓	✓	Calibration schedule warning function	✓	✓
Resolution selecting	✓*2	✓	Auto OFF	✓	—
Tolerance judgment	✓	✓	Reset all settings	✓	✓
Simple calculation	✓	✓			

*1: in/mm models only *2: Except 0.01 mm/0.0005 in models


Dimensions (ID-C Series)

12.7 mm range models

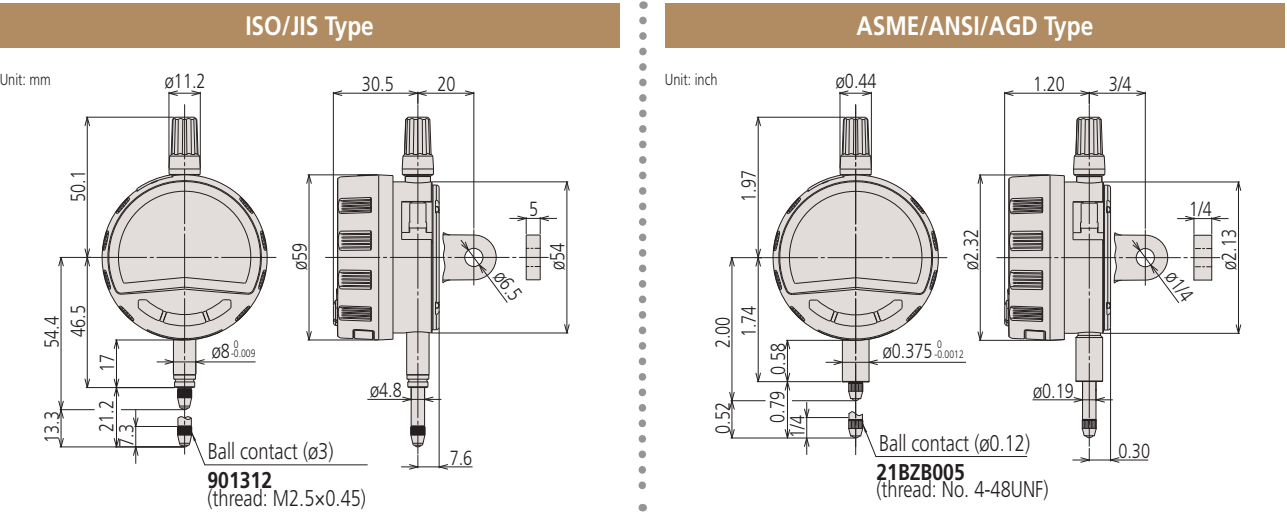



Note: Products with a code No. suffixed "B" have a flat back, and other models have a center-lug back.

25.4 mm range models

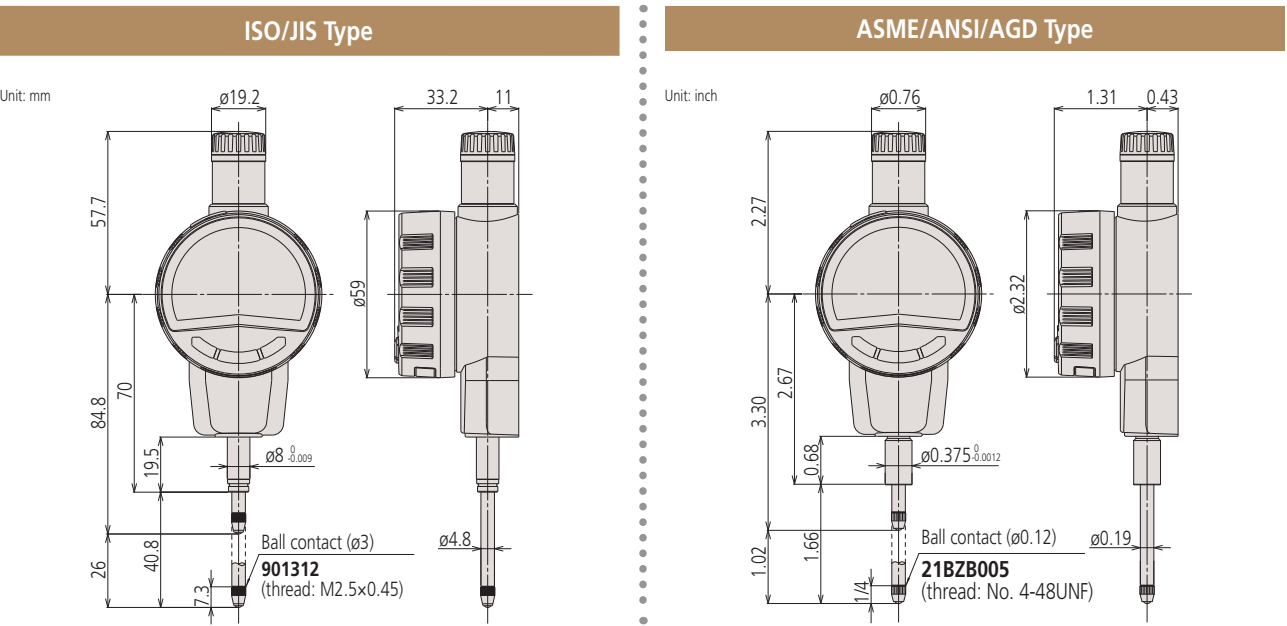

Note: All products have a flat back.



50.8 mm range models

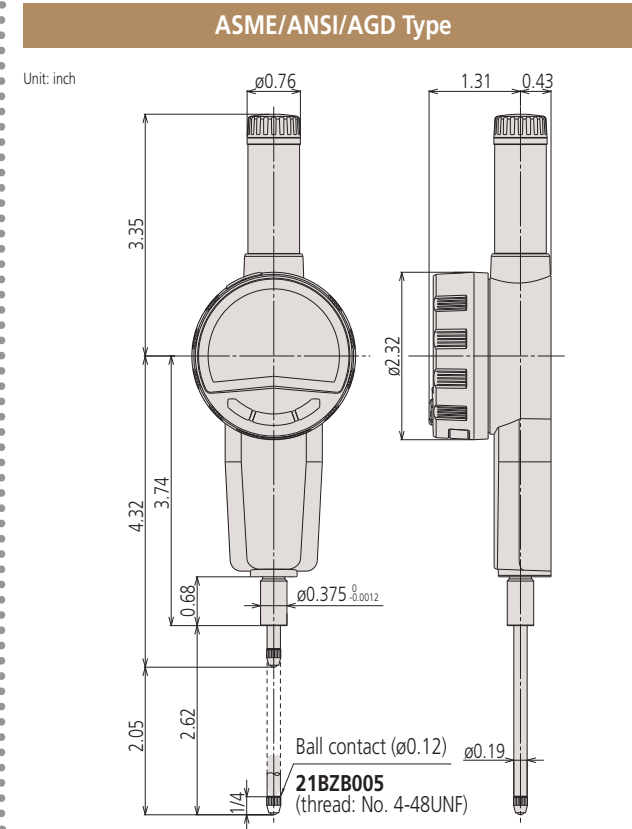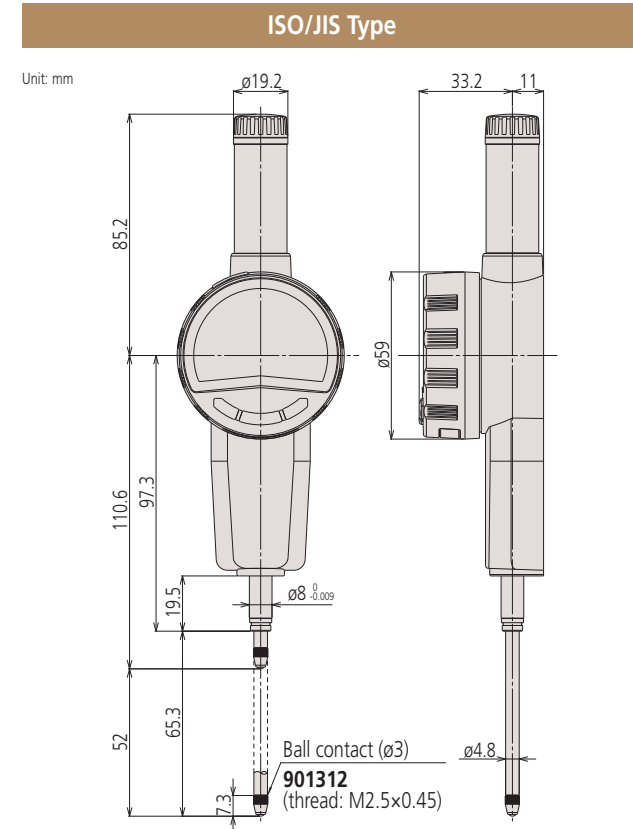

Note: All products have a flat back.



Dimensions (ID-F Series)

12.7 mm range models

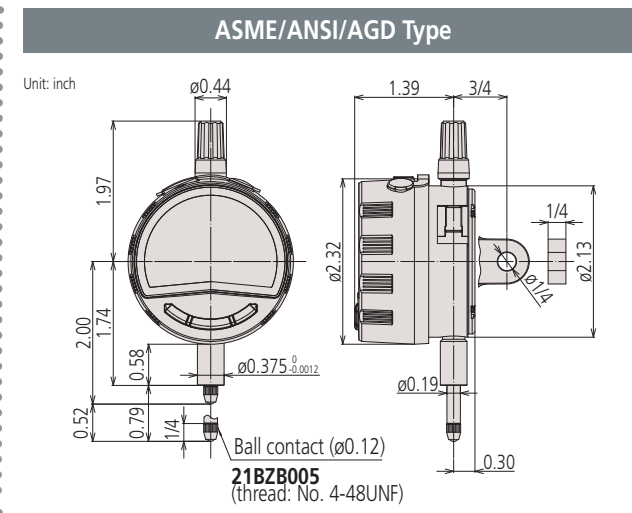
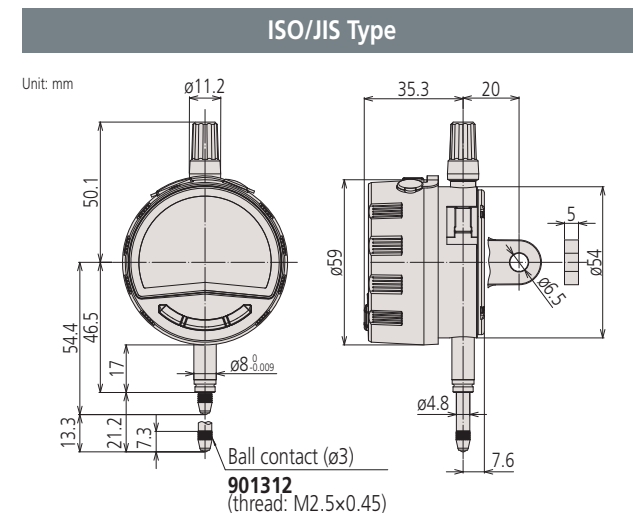


Note: Products with an Order No. suffixed "B" have a flat back, and other models have a center-lug back.

25.4 mm range models

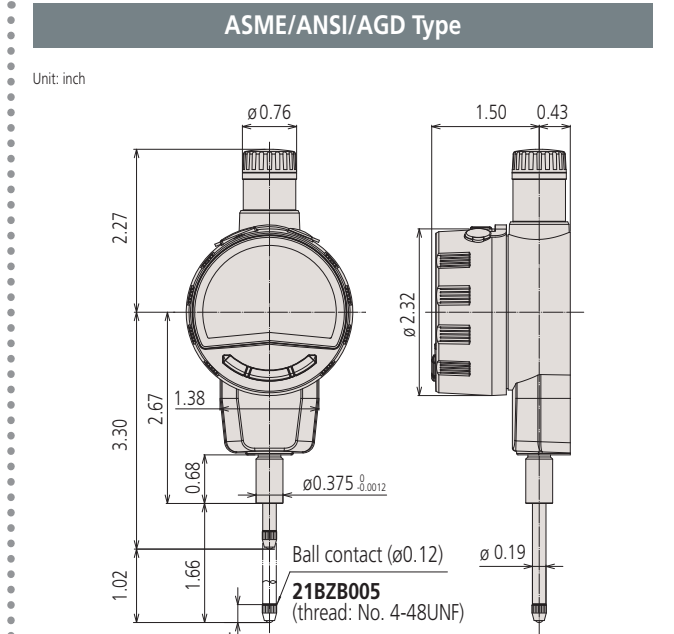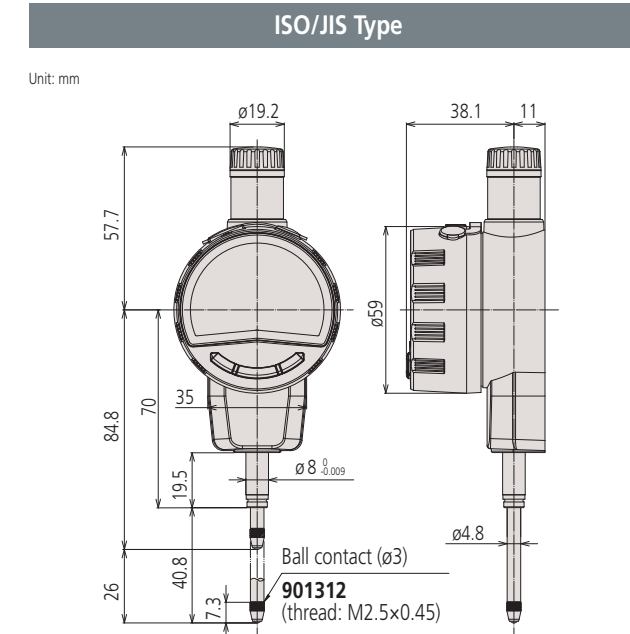

50.8 mm range models

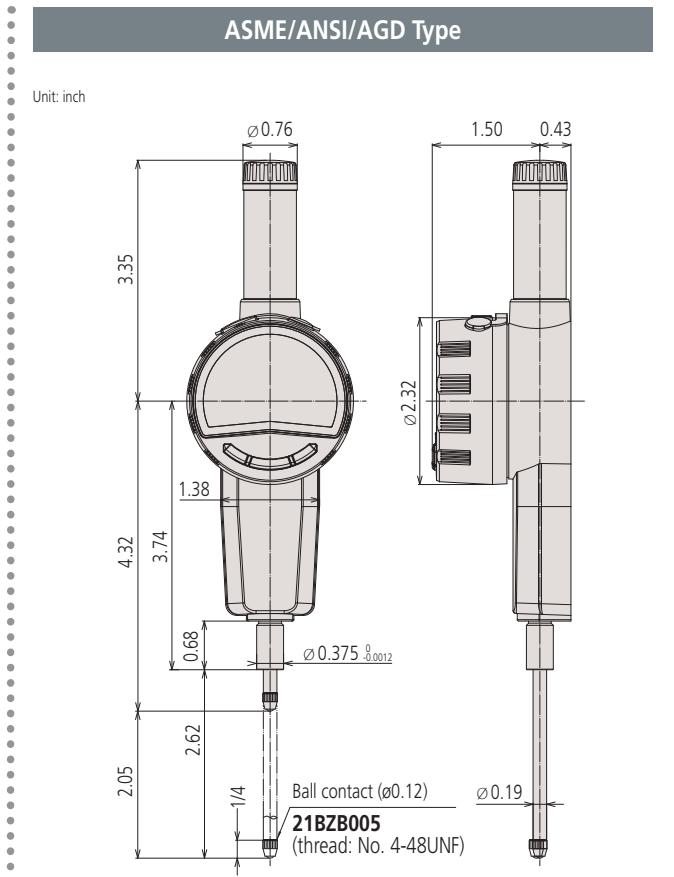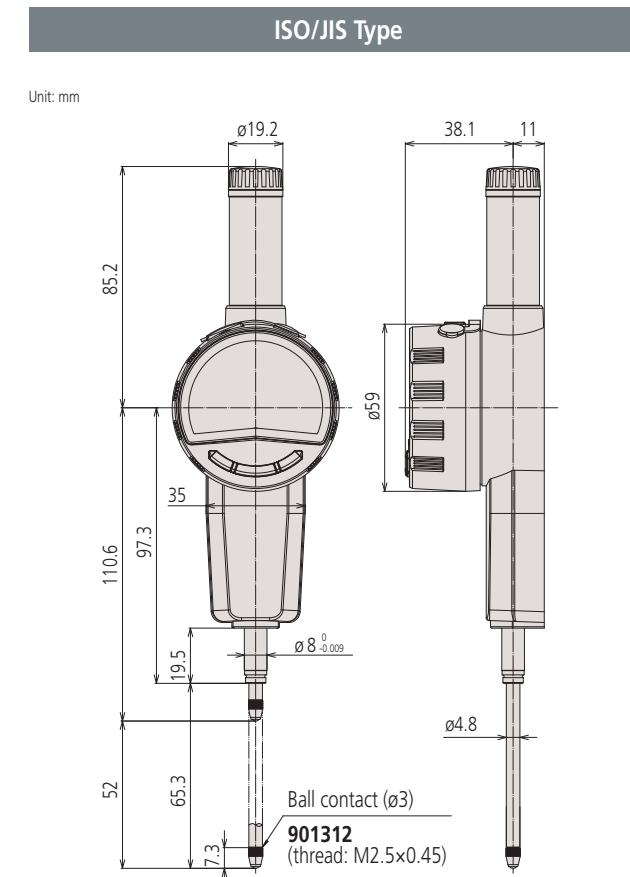

Optional Accessories Options

Cable Can be used for both ID-C/ID-F with SPC cable.

Measurement Data Input Unit
USB Input Tool Direct (2 m)
USB-ITN-SF



No.06AGQ001F

Measurement Data Input Unit
USB Input Tool
IT-020U



No.264-020

SPC Connection Cable

SPC Cable for connecting ID-C/ID-F to an external device such as IT-020U. Can be used for both ID-C/ID-F.



No.06AGL011

SPC Connection Cable (2 m)



No.06AGL021

Software

Measurement Data Collection Software
USB-ITPAK V3.0



USB-ITPAK V3.0 full version dongle



USB dongle

Measurement data collection software USB-ITPAK V3.0 can be downloaded from our website. The above dongle is required to use the full functions.

No.06AGR543

U-WAVE If using U-WAVE, please note that it does not support bidirectional serial communication.

Transmission Unit (U-WAVE-TM)



Buzzer type No.264-623
Waterproof/dustproof type No.264-622

Transmission Unit (U-WAVE-TMB)



Buzzer type No.264-627
Waterproof/dustproof type No.264-626

Measurement Data Wireles Reception Unit (U-WAVE-R)



No.02AZD810D

Connection Unit (for 12.7 mm range models only)




Attachment example



Optional items such as a lifting lever can be attached while the U-WAVE-TM/TMB is in place.
*Cannot be attached to the models with center-lug back.


No.02AZF700

Standard U-WAVE-T Dedicated Connection Cable

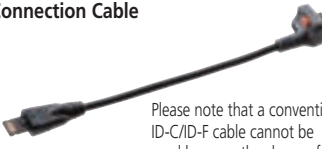

No.02AZG011

U-WAVE-T Dedicated Connection Cable for Foot Switch

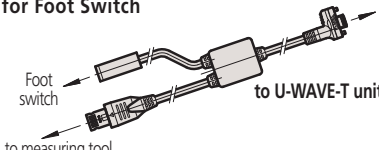

No.02AZG021

U-WAVE Mounting Plate



No.02AZF670

Foot Switch



No.937179T

Many other options are also available. For details, please visit our website. <https://www.mitutoyo.co.jp>

Software Reduces the time and effort needed for inspection work


Measurement Data Collection Software

USB-ITPAK V3.0

USB-ITPAK is useful software to create procedures when inputting measurement data into Excel sheets. The latest version allows the user to perform batch power-on for ID-C/ID-F units, batch power-off at the end of measurement, batch zero setting and presetting, data acquisition instruction from a PC, etc.

Equipped with an automatic sorting function for sorting input measurement data [Easy input mode]

This function can be implemented even if the measuring instrument does not support bidirectional serial communication. After setting, measurement values are automatically sorted into an Excel sheet as needed.



Just preset the number of measurement items.(Example: number of measurement items = 3)

- 1 D: 10 mm
- 2 H: 20 mm
- 3 W: 30 mm

With normal input
(Entered into column A only.)

1	1	10.11
2	2	20.05
3	3	29.99
1	4	10.54
2	5	20.45

With automatic sorting function
(Once entered into column A, similar data is automatically classified.)

1	1	10.11	20.05	29.99
2	2	20.05	10.54	20.45
3	3	29.99	9.99	20.67
1	4	10.54	20.67	30.22
2	5	20.45		

Simplifies measuring instrument setting


Batch setting of ID-C/ID-F units can be performed from your PC. Moreover, the settings can be saved on your PC and copy to other ID-C/ID-F units. Without even touching the ID-C/ID-F units.



USB-ITPAK V2.1/V3.0 Function comparison table

Symbols: ✓¹ : Can be used only when connected with USB-ITPAK V3.0 and ID-C/ID-F;
✓ : Can be used; — : Cannot be used

Operating environment and functions		Details	ITPAK		
			V2.1	V3.0	
				Trial version (free)	Full version
Supported communication standard	Digimatic d1/d2	d1: 1st generation, unidirectional communication, 6-digit communication / d2: 2nd generation, unidirectional communication, 8-digit communication	—	✓	—
	Digimatic S1	3rd generation, bidirectional serial communication, 8-digit communication	—	—	✓
Supported operating systems		Windows 2000 SP4, Windows XP SP2 or later, Windows Vista, Windows 7, Windows 8 / 8.1	✓	—	—
		Windows 10	—	✓	—
		Windows 11	—	—	✓
Functions	Sequential measurement	With this method, when using one or several measuring instruments, the measurement data are input into an Excel sheet from the measuring instrument(s) registered in advance.	✓	—	✓
	Batch measurement	With this method, measurement data are acquired in batch from several measuring instruments and input into an Excel sheet.	✓	—	✓
	Individual measurement	The Excel sheets and cells for inputting measurement data are set individually for each measuring instrument. With this method, measurements performed randomly by multiple operators can be input from each instrument into their specified sheets and cells.	✓	—	✓
	Simple measurement function	This function makes it possible to start measuring without prior detailed settings and to sort data into Excel columns according to measurement location.	—	—	✓
	Measuring instrument setting	Function to change the various settings (zero setting, registration of preset values, setting of unit, counting direction, and tolerance) of connected measuring instruments.	—	✓ ¹	—
	Measurement history	This function saves information on the measurement operator and the measurement equipment used within the measurement data. (It records in the data who used what to measure the data.)	—	✓ ¹	—
	Device information	This function reads various information about connected measuring instruments (model, serial No., calibration date) and displays it on the PC.	—	✓ ¹	—
	Data input into Microsoft Excel	This function is used to input values into user-specified cells in Excel.	✓	—	✓
	Text data input with virtual keyboard	This function is used to input text (characters and values) into specified cells in Excel.	✓	—	✓

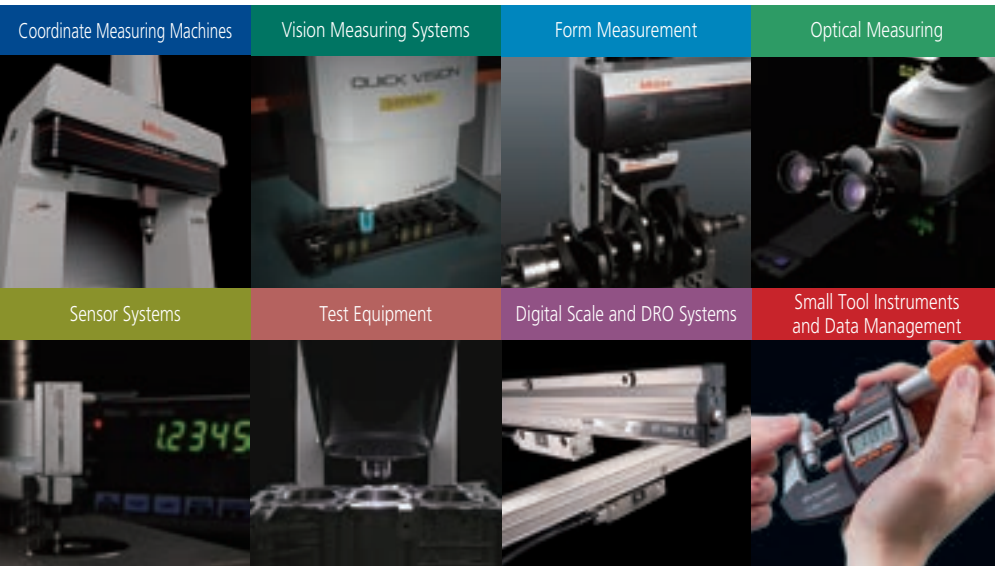

Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.



Find additional product literature and our product catalogue

<https://www.mitutoyo.co.jp/global.html>

Notes on Export Regulations:

Do not commit an act, which could directly or indirectly, violate any law or regulation of Japan, your country or any other international treaty, relating to the export or re-export of any commodities.

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MITUTOYO and MICAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.

All product information contained in this brochure is current as of July 2024.

Mitutoyo

Mitutoyo Corporation

20-1, Sakado 1-Chome,
Takatsu-ku, Kawasaki-shi,
Kanagawa 213-8533, Japan

T +81 (0) 44 813-8230

F +81 (0) 44 813-8231

<https://www.mitutoyo.co.jp>