



Vernier Caliper SERIES 530 — Standard Model

- This is a standard analog caliper. It can measure the outside, inside, depth, and step.
- The small Vernier face angle (14°) provides easy reading.
- Carbide-tipped jaw calipers are optimal for rough finished parts, castings, grinding stones, etc.

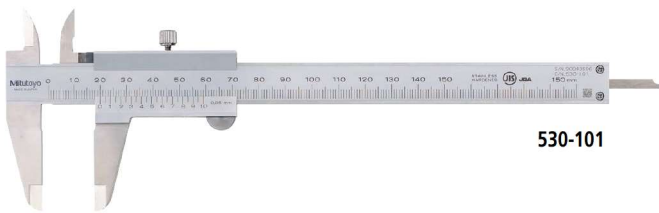


530-101

Measurement example

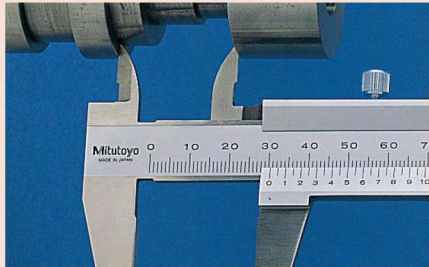

Round depth bar type



530-102

Carbide-tipped jaws for outside measurement



530-320

SPECIFICATIONS

Metric							
Code No.	Range (mm)	Graduation (mm)	Maximum permissible error (mm)*		Depth bar	Remarks	
			EMPE	SMPE			
530-101	0 - 150	0.05	±0.05	±0.07	Blade	—	
530-122		0.02	±0.03	±0.05		High accuracy model	
530-108	0 - 200	0.05	±0.05	±0.07		—	
530-123		0.02	±0.03	±0.05		High accuracy model	
530-109	0 - 300	0.05	±0.08	±0.10		—	
530-124		0.02	±0.04	±0.06		High accuracy model	
Code No.	Range (mm)	Graduation (mm)	Maximum permissible error (mm)*		Depth bar	Remarks	
			EMPE	SMPE			
530-100	0 - 100	0.05	±0.05	±0.07	ø1.9 mm rod	—	
530-102	0 - 150		±0.05	±0.07		—	
530-320			±0.05	±0.07	Blade	Carbide-tipped jaws for outside measurement	
530-335			±0.05	±0.07		Carbide-tipped jaws for outside and inside measurement	
530-321	0 - 200		±0.05	±0.07		Carbide-tipped jaws for outside measurement	
530-322	0 - 300		±0.08	±0.10		Carbide-tipped jaws for outside measurement	
530-501	0 - 600		±0.10	±0.12	—	—	
530-502	0 - 1000		±0.15	±0.17			
Metric/Inch			with metric/inch double scale				
Code No.	Range	Graduation	Maximum permissible error		Depth bar	Remarks	
			EMPE	SMPE			
530-104	0 - 150 mm/ 0 - 6 in	0.05 mm (1/128 in)	±0.05 mm/ ±0.5/128 in	±0.07 mm/ ±0.5/128 in	Blade	—	
530-316		0.02 mm (0.001 in)	±0.03 mm/ ±0.001 in	±0.05 mm/ ±0.002 in		Clamping screw below the slider	
530-312			±0.03 mm/ ±0.001 in	±0.05 mm/ ±0.002 in		High accuracy model: ±0.03 mm	
530-114	0 - 200 mm/ 0 - 8 in	0.05 mm (1/128 in)	±0.05 mm/ ±0.5/128 in	±0.07 mm/ ±0.5/128 in		—	
530-118		0.02 mm (0.001 in)	±0.03 mm/ ±0.001 in	±0.05 mm/ ±0.002 in		High accuracy model: ±0.03 mm	
530-115	0 - 300 mm/ 0 - 12 in	0.05 mm (1/128 in)	±0.08 mm/ ±0.5/128 in	±0.10 mm/ ±0.5/128 in		—	
530-119		0.02 mm (0.001 in)	±0.04 mm/ ±0.0015 in	±0.06 mm/ ±0.0025 in	High accuracy model: ±0.04 mm		
Inch		with inch/inch double scale					
Code No.	Range (in)	Graduation (in)	Maximum permissible error (in)		Depth bar	Remarks	
			EMPE	SMPE			
530-105	0 - 6	0.001 (1/128)	±0.001/±0.5/128	±0.002/±0.5/128	Blade	—	
530-116	0 - 8						


* The Partial Surface Contact Error (EMPE) and Shift Error (SMPE) are terms defined by ISO 13385-1:2019.

Calipers

Vernier Caliper
SERIES 530 — Standard Model

DIMENSIONS

Unit: mm

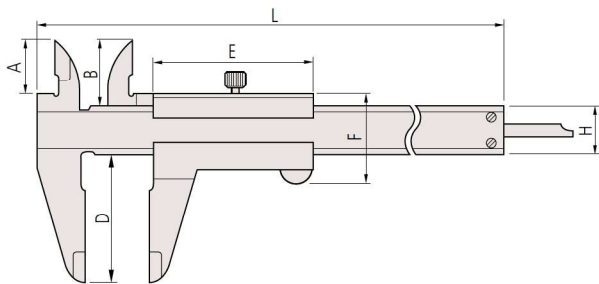

Range (mm)	A	B	D	E	F	H	L	Outside jaw thickness
0 - 100	17	21.5	40	53.5	30	16	182	3
0 - 150							229	
0 - 200							288	
0 - 300	22	27.5	64	66.5	36	20	404	3.8
0 - 600	38	47	90	89	50	25	780	6
0 - 1000	50	60	130	111	61	32	1240	8

Note: **530-100** and **530-102** incorporate a round depth bar (ø1.9 mm).
The depth bar shown in the illustration above is a different type.