


Dial Indicators

Optional Accessories for Digimatic and Dial Indicators and Linear Gages

Contact points, extension rod

- The thread of all contact points is M2.5 (P=0.45)×5 mm.
- After replacement, it must be tightened firmly to prevent looseness during use (recommended tightening torque: 50 N·cm).
- Carbide and ruby contact points are highly resistant to wear.

Standard contact point

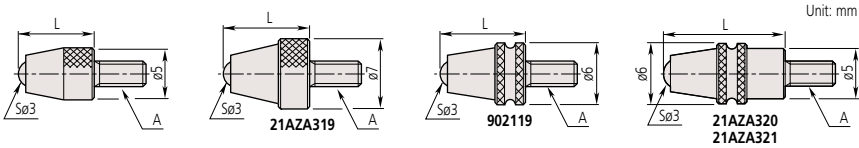

A: M2.5×0.45


L (mm)	Carbide		Ruby	Plastic
	Without groove	With groove (water-proof type)	Without groove	Without groove
7.3	901312	—	120047	901994
8.3	21AZA319	902119	—	—
12.1	—	21AZA320	—	—
14	21JAA225	—	—	—
15	120049	—	120051	—
17	21JAA224	—	—	—
19.3	—	21AZA321	—	—
20	137391	—	137392	—
22	21JAA226	—	—	—
25	120053	—	120055	—
30	21AAA252	—	21AAA253	—



901312



902119

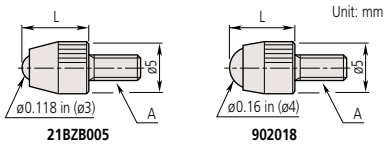

A: 4-48UNF

L (in)	Material	Carbide	Plastic
		21BZB005	902018
1/4			