

Non-rotating Spindle Type Digital Micrometer Quickmike

COOLANT PROOF™ IP65



1 revolution of thimble feeds the non-rotating spindle
10 mm!



Thimble **1** revolution



Quickmike's evolution to easier and speedier measurement!

Quickmike

MeasurLink[®] ENABLED
Data Management Software by Mitutoyo

Products equipped with the measurement data output function can be connected to the measurement data network system MeasurLink



293-666-20



293-668-20



Quick measurement

20 times faster feed rate


The Quickmike provides a speedy spindle feed of 10 mm per thimble rotation that enables widely differently sized features to be measured quickly. Also, 30 mm of wide measuring range, which is 5 mm longer than the standard type, allows measurement of multiple workpieces.



Absolute scale


The ABS (absolute) linear scale eliminates the need for origin point setting at every power-on and achieves high reliability while being free from overspeed error.

ABSOLUTE[™]

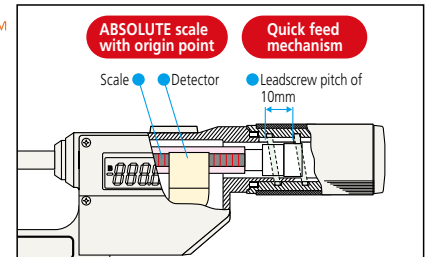

Function locking prevents misoperation!

Function lock enhances usability by preventing the origin from being accidentally changed during measurement.



Minimum-value hold function ensures measurement value is retained!

The micrometer spindle can be retracted from the workpiece while the measurement value is retained in the display until cleared.



Protection level upgraded from IP54 to IP65

Resistant to oil, water, and dust ingress. Useful on the shop floor where coolant may splash on the micrometer.

COOLANT PROOF[™] IP₆₅

COOLANT PROOF is the universal term for Mitutoyo Digimatic Small Tool Instruments that are not only resistant to dust and water ingress but also to deterioration due to contact with the cutting oil or coolant fluids*1 in normal use.

*1: Some types of aggressive cutting oil or coolant may degrade the sealing materials over time.

Visibility improved

Extra-large LCD digits enable easy reading of measurement values.




Extended battery life

Low-power electronics have extended the battery life to 5 years in normal use*2.

*2: Typical, assuming average frequency of use and normal applications.

Battery cap can be easily opened

The groove in the battery cap has been increased from 1.8 mm to 2.4 mm in width to enable the cap to be more easily opened.

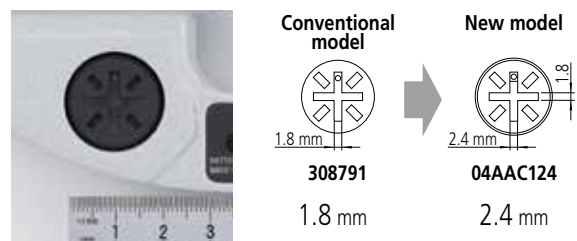

Standard Micrometers

Specifications


Metric						
Order No.	Range	Accuracy*	Flatness	Parallelism	Constant-force device	Mass
293-666-20	0 - 30 mm	±2 μm	0.3 μm	2 μm	Yes	275 g
293-667-20	25 - 55 mm					340 g
293-668-20	50 - 80 mm	±3 μm	0.3 μm	3 μm	Yes	480 g
293-669-20	75 - 105 mm					585 g

* Excluding quantizing error of ±1 count

Inch/Metric						
Order No.	Range	Accuracy*	Flatness	Parallelism	Constant-force device	Mass
293-676-20	0 - 1.2 in	±0.0001 in	0.000012 in	0.00008 in	Yes	275 g
293-677-20	1 - 2.2 in					340 g
293-678-20	2 - 3.2 in	±0.00015 in	0.000012 in	0.00012 in	Yes	480 g
293-679-20	3 - 4.2 in					585 g

* Excluding quantizing error of ±1 count

Dimensions

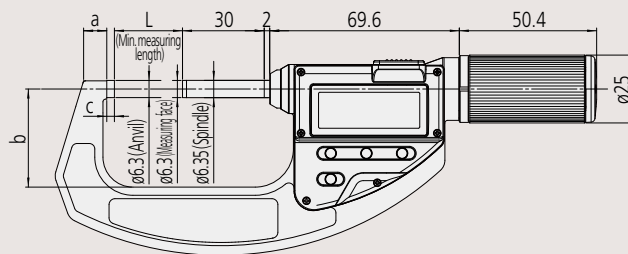

Unit: mm

Measuring range	L	a	b	c
0 - 30 mm	0	6.2	25	2
25 - 55 mm	25	8.5	36	2.8
50 - 80 mm	50	10.3	47	2.8
75 - 105 mm	75	10.7	60	2.8

Special-purpose types

Crimp Height Micrometer




342-451-20

Features

- For crimp height measurement of a crimped terminal

Specifications

- Range: 0 - 15 mm (342-451-20)
- Accuracy: ±3 μm



Disk Micrometers




369-411-20

Features

- For root tangent length measurement of spur and helical gears
- Measurable range of gear pitch: 0.5 to 6 module

Specifications

- Ranges: 0 - 30 mm (369-411-20)
- 25 - 55 mm (369-412-20)
- 0 - 1.2 in (369-421-20)
- 1 - 2.2 in (369-422-20)
- Accuracy: ±4 μm / ±0.0002 in
- Parallelism: 4 μm / 0.0002 in
- Flatness: 1 μm / 0.00004 in



Blade Micrometers




422-411-20

Features

- Blade type anvil and spindle for measuring narrow-groove diameters and similar features of round workpieces.

Specifications

- Ranges: 0 - 30 mm (422-411-20)
- 25 - 55 mm (422-412-20)
- 0 - 1.2 in (422-421-20)
- 1 - 2.2 in (422-422-20)
- Accuracy: ±3 μm / ±0.00015 in
- Parallelism: 3 μm / 0.00015 in



Common specifications

- Spindle feed: 10 mm per revolution
- Resolution: 0.001 mm
- Quantizing error: ±1 count
- Protection level: IP65 *3
- Power supply: Silver oxide button cell battery SR44
- Battery life: Approx. 5 years under normal use
- Output: Measurement Data
- Operating temperature: 5 to 40 °C
- Storage temperature: -10 to 60 °C
- Standard accessories: Silver oxide button cell battery SR44 (9038882), 1 pc. supplied for testing purposes only.
- Setting standard (excluding 0-15/30 mm and 0-1.2 inch range models)


*3: Rust prevention treatment should be applied after use.

Common functions

- Preset (ABS measurement system)
- Zero-setting (INC measurement system)
- Hold
- Function lock
- Auto power off
- Measurement Data output
- Error alarm
- Minimum value hold

Optional accessories

- Connecting cable to DP-1VA LOGGER
 - 1 m: **05CZA662**
 - 2 m: **05CZA663**
 Note: Water-proof type which is not compatible with standard Digimatic micrometers.
- Digimatic mini processor DP-1VA LOGGER: **264-505**
- Connection with PC (wired communication): USB Input Tool Direct
 - USB-ITN-B (2 m): **06AFM380B**
- Connection with PC (wireless communication): Connecting cable to U-WAVE-T (160 mm): **02AZD790B**
- Cable for foot switch: **02AZE140B**

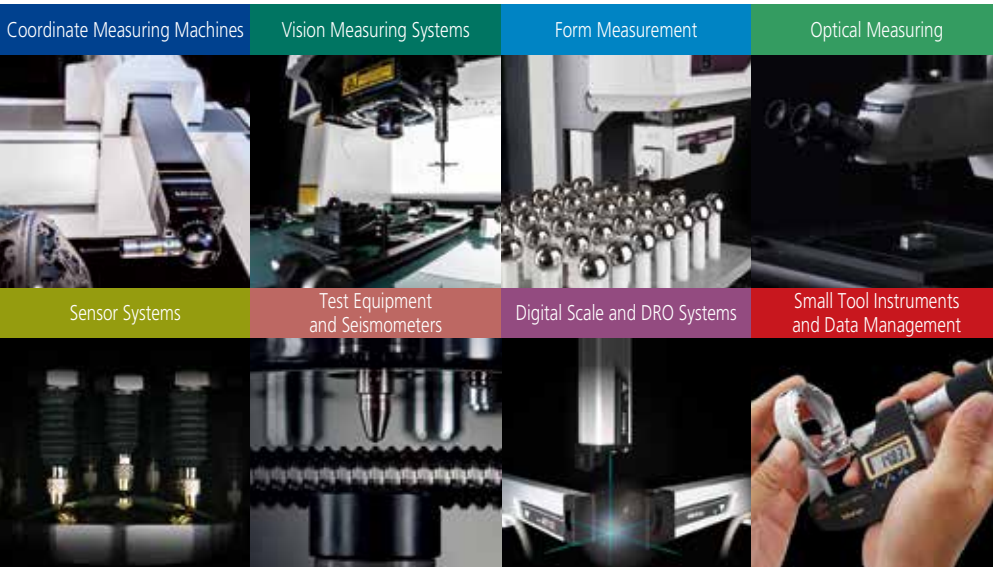

**Whatever your challenges are,
Mitutoyo supports you from start to finish.**

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver bespoke measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MITUTOYO and MICAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.



www.mitutoyo.com.sg | www.mitutoyo.com.my
www.mitutoyo.co.th | www.mitutoyo.co.id
www.mitutoyo.com.vn | www.mitutoyo.com.ph

Small Tools Authorized Distributor

Mitutoyo

Mitutoyo Asia Pacific Pte. Ltd.

Company Reg No. 197800892N

24 Kallang Avenue, Mitutoyo Building, Singapore 339415

Tel: (65) 6294 2211 Fax: (65) 6299 6666

E-mail: mapsg@mitutoyo.com.sg

Mitutoyo (Malaysia) Sdn. Bhd.

Mah Sing Integrated Industrial Park,
4, Jalan Utarid US/14, Section U5,
40150 Shah Alam, Selangor, Malaysia

Tel: (60) 3-7845 9318

Fax: (60) 3-7845 9346

E-mail: mmsb@mitutoyo.com.my

Penang Branch

Tel: (60) 4-641 1998 Fax: (60) 4-641 2998

Johor Branch

Tel: (60) 7-352 1626 Fax: (60) 7-352 1628

Mitutoyo (Thailand) Co., Ltd.

76/3-5, Chaengwattana Road, Kwaeng
Anusawaree, Khet Bangkaen,
Bangkok 10220, Thailand

Tel: (66) 2080 3500

Fax: (66) 2521 6136

E-mail: office@mitutoyo.co.th

Chonburi Branch

Tel: (66) 2080 3563 Fax: (66) 3834 5788

ACC Branch

Tel: (66) 2080 3565

PT. Mitutoyo Indonesia

Jalan Sriwijaya No.26
Desa cibatu
Kec. Cikarang Selatan
Kab. Bekasi 17530, Indonesia

Tel: (62) 21-2962 8600

Fax: (62) 21-2962 8604

E-mail: ptmi@mitutoyo.co.id

Mitutoyo Vietnam Co., Ltd.

1st & 2nd Floor, MHDI Building,
No. 60 Hoang Quoc Viet Road,
Nghia Do Ward, Cau Giay District,
Hanoi, Vietnam

Tel: (84) 24-3768 8963

Fax: (84) 24-3768 8960

E-mail: mvc@mitutoyo.com.vn

Ho Chi Minh City Branch

Tel: (84) 28-3840 3489

Fax: (84) 28-3840 3498

E-mail: mvc@mitutoyo.com.vn

Mitutoyo Philippines, Inc.

Unit 1B & 2B LTI,
Administration Building 1,
Annex 1, North Main Avenue,
Laguna Technopark, Biñan,
Laguna 4024, Philippines

Tel: (63) 49-544 0272

Fax: (63) 49-544 0272

E-mail: mpi@mitutoyo.com.ph