
Long Jaw Vernier Caliper SERIES 534

- Long jaws for measuring hard-to-reach workpiece features. Suitable for measuring outside diameter of workpieces such as large pipes or spherical objects.
- Inside and outside measurements can be read directly from the upper and lower slider graduations respectively.

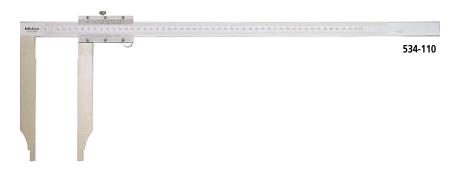

SPECIFICATIONS

| Metric with inside measurement Vernier scale | | | | | | | | |
|--|----------|--------------------------|-----------------|----------------------------------|-------|-------------------------|--|--|
| | Code No. | Range (mm)* ¹ | Graduation (mm) | Maximum permissible error (mm)*2 | | Remarks | | |
| | | | | Емре | Smpe | Kellidiks | | |
| | 534-109 | 0 (10.1) - 300 | 0.05 | ±0.07 | ±0.07 | without fine adjustment | | |
| | 534-110 | 0 (20.1) - 500 | | ±0.13 | ±0.13 | | | |

- *1 (): Minimum dimension in ID measurement
- *2 The Partial Surface Contact Error (EMPE) and Shift Error (SMPE) are terms defined by ISO 13385-1:2019.

| Metric/Inch with metric/inch double scale | | | | | | | | |
|---|----------|---|----------------------|-----------------------------|---------------------------|--|--|--|
| | Code No. | Range*1 | Graduation | Maximum permissible error*2 | | Remarks | | |
| | Code No. | Nange | Graduation | Емре | Ѕмре | Nemarks | | |
| | 534-101 | 0 - 300 mm/0 - 12 in | 0.05 mm/ 1/128 in | ±0.07 mm/ ±0.5/128 in | ±0.07 mm/ ±0.5/128 in | +10 mm/0.394 in to reading in inside measurement without fine adjustment | | |
| - | | (10.1 - 300 mm/0.398 - 12 in) 0 - 300 mm/0 -12 in | 0.02 mm/ | ±0.5/128 III ±0.04 mm/ | ±0.5/128 III ±0.04 mm/ | | | |
| | 534-105 | (10.1 - 300 mm/0.398 - 12 in) | 0.02 mm/ 0.001 in | ±0.04111117 | ±0.04 mm/ | | | |
| | 534-102 | 0 - 500 mm/0 - 20 in | 0.05 mm/ | ±0.13 mm/ | ±0.13 mm/ | | | |
| | 334-102 | | 1/128 in | ±0.5/128 in | ±0.5/128 in | +20 mm/0.787 in to reading in inside measurement without fine adjustment | | |
| | 534-106 | (20.1 - 500 mm/0.791 - 20 in) | 0.02 mm/ | ±0.06 mm/ | ±0.06 mm/ | | | |
| | 334-100 | | 0.001 in | ±0.0025 in | ±0.0025 in | | | |
| | 534-103 | 0 - 750 mm/0 - 30 in (20.1 - 750 mm/0.791 - 30 in) | 0.05 mm/ | ±0.16 mm/ | ±0.16 mm/ | | | |
| | | | 1/128 in | ±1/128 in | ±1/128 in | | | |
| | 534-107 | | 0.02 mm/ | ±0.08 mm/ | ±0.08 mm/ | | | |
| | 554-107 | | 0.001 in | ±0.003 in | ±0.003 in | | | |
| | 534-104 | 0 - 1000 mm/0 - 40 in (20.1 - 1000 mm/0.791 - 40 in) | 0.05 mm/ | ±0.2 mm/ | ±0.2 mm/ | | | |
| | 354-1U4 | | 1/128 in | ±1/128 in | ±1/128 in | | | |
| | 534-108 | | 0.02 mm/ | ±0.1 mm/ | ±0.1 mm/ | | | |
| | JJ4-100 | | 0.001 in | ±0.004 in | ±0.004 in | | | |

- *1 (): Minimum dimension in ID measurement *2 The Partial Surface Contact Error (EMPE) and Shift Error (SMPE) are terms defined by ISO 13385-1:2019. Note: For external dimensions, refer to page 04-28.

