


Optional Accessories

Code No.	Type	Description
264-020	—	USB Input Tool Series USB Keyboard Signal Conversion Type IT-020U
05CZA624	A	Connection cable for IT/DP/MUX (1 m)
05CZA625	A	Connection cable for IT/DP/MUX (2 m)
06AFM380A	A	USB Input Tool Direct (2 m)
02AZD730G	IP67	U-WAVE-T
02AZD880G	Buzzer	U-WAVE-T
02AZE200	—	U-WAVE-T mounting bracket
02AZD790A	A	Connection cable for U-WAVE-T (160 mm)
02AZE140A	A	Connection cable for U-WAVE-T For foot switch

Inspection equipment for center-to-center type*

05FAJ735

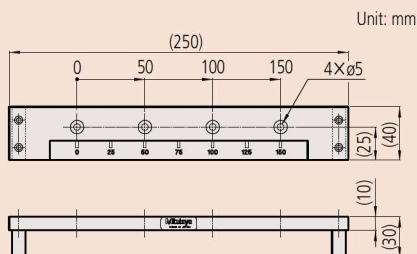

* Inspection equipment for Edge-to-center type is available by special order.

ABSOLUTE Back-Jaw Centerline Caliper SERIES 573 — Center-to-Center & Edge-to-Center Types

- Specially designed to measure hole Center-to-Center and Edge-to-Center distances. Provided with jaws on the back of the slider, measurements can be read easily from above.
- Direct reading of pitch measurements is possible due to the offset-value setting function.

Edge-to-center distance type



573-718-20

SPECIFICATIONS

Metric

Code No.	Range (mm)	Resolution (mm)	Maximum permissible error (mm)*2	
			EMPE	SMPE
573-718-20*1	10.1 - 200	0.01		±0.10
573-719-20*1	10.1 - 300			±0.15

• Power source: SR44 battery (1 pc.), **938882** included as standard (for operational checks)


• Position detection method: ABSOLUTE electromagnetic induction linear encoder

• Response speed: Unlimited

*1 Applicable hole diameter: ø1.5 - ø19.5 mm

*2 The Partial Surface Contact Error (EMPE) and Shift Error (SMPE) are terms defined by ISO 13385-1:2019.

DIMENSIONS

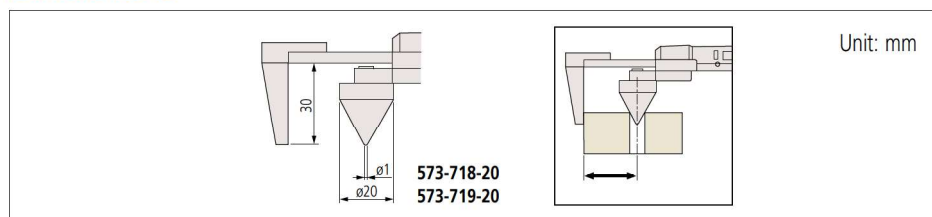

Center-to-center distance type



573-716-20

SPECIFICATIONS

Metric

Code No.	Range (mm)	Resolution (mm)	Maximum permissible error (mm)*2	
			EMPE	SMPE
573-716-20*1	10.1 - 200	0.01		±0.10
573-717-20*1	10.1 - 300			±0.15

• Power source: SR44 battery (1 pc.), **938882** included as standard (for operational checks)

• Position detection method: ABSOLUTE electromagnetic induction linear encoder

• Response speed: Unlimited

*1 Applicable hole diameter: ø1.5 - ø19.5 mm

*2 The Partial Surface Contact Error (EMPE) and Shift Error (SMPE) are terms defined by ISO 13385-1:2019.

DIMENSIONS

